



# SMALLEST & LIGHTEST 5 GAS MONITOR

Gas Detection For Life

GX-3R Pro Model



## 5 World's Smallest and Lightest Gas Monitor

### Features

- **Smallest & lightest 5 gas monitor**
  - 2.9" W x 2.6" H x 1.06" D , 4.58 ounces
- **Simultaneous detection of 5 gases**
  - LEL, O<sub>2</sub>, H<sub>2</sub>S, CO, and other optional sensors
  - H<sub>2</sub> Compensated CO sensor available
- **Simple 2-button operation**
- **Bluetooth communication with iOS & Android App**
- **Non-Compliance Indicator**
- **3 user adjustable alarm levels**
- **Panic Alarm**
  - Tap instrument twice
- **Man Down Alarm**
- **Impact resistant body**
- **Large full dot, auto-backlit display with auto-rotation**
- **Stealth mode for law enforcement**
- **Field replaceable sensors & filters**
- **Water and dust resistant design, IP66/68**
- **3 Year Warranty**

### Applications


- **Personal monitoring**
- **Confined spaces**
- **Refineries/petrochemical**
- **Utilities**
- **Oil and Gas**
- **Water/wastewater**
- **Fire services**
- **Construction**

The GX-3R Pro is the world's smallest 5-gas monitor weighing only 4.58 ounces and fits in the palm of your hand (2.9" W x 2.6" H x 1.06" D). It simultaneously monitors and displays 5 different gases. In addition to monitoring standard confined space gases, LEL, O<sub>2</sub>, CO, & H<sub>2</sub>S, the GX-3R Pro has a 5th channel where you can add infrared or toxic sensors. Two of the four sensor slots have interchangeable sensors providing flexible configurations, which can easily be changed in the field.

The GX-3R Pro comes equipped with Bluetooth wireless communication, man-down alarm, the choice of alkaline or rechargeable power supply, and a 3 year warranty. The Lithium-ion battery pack will operate for 25 hours and will fully charge in 3 hours.

The GX-3R Pro utilizes Bluetooth communication to display direct gas readings from the instrument to a phone app, which is available free on either iOS or Android phones. Automatic notifications can be programmed to send text or email messages, if there is an alarm event from the GX-3R Pro.

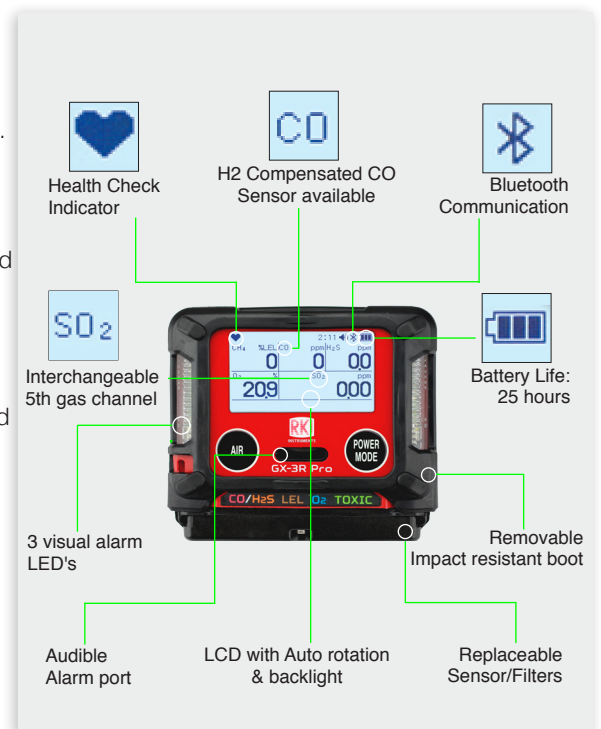

Safety supervisors will appreciate the non-compliance indicator. The instrument flashes it's 3 LED lights every 30 seconds in the following conditions; if the instrument has not been bump tested, or if calibration is due, or if there was a gas alarm event. The 3 LED lights will continue to flash once every 30 seconds until the non-compliance condition has been resolved. The 30 second interval is adjustable.



RKI Instruments, Inc. • 33248 Central Ave. Union City, CA 94587 • Phone (510) 441-5656 • (800) 754-5165 • Fax (510) 441-5650

World Leader In Gas Detection & Sensor Technology  
[www.rkiinstruments.com](http://www.rkiinstruments.com)

# GX-3R Pro Model

Detectable Gases					Common Specifications					
Gas		Measuring Range (Increments)	Accuracy Statement	Preset Alarms	Sampling Method		Display			
<b>Sensor Slot 1: Carbon Monoxide (CO) &amp; Hydrogen sulfide (H2S) *Interchangeable</b>					Diffusion sampling standard (hand aspirator or clip-on motorized pump optional)		Full dot LCD with Autobacklight and Autorotation			
H2S / CO	Dual EC	0 ~ 2000 ppm (1 ppm)	± 5% of reading or ± 5 ppm CO	A1: 25 ppm   A2: 50 ppm A3: 1200 ppm   TWA: 25 ppm STEL: 200 ppm	Alarm Types	<b>Gas Alarm</b> • 2 increasing alarms • STEL • TWA • Overscale alarm • O2 decreasing/increasing • Man Down Alarm • Panic Alarm	<b>Trouble Alarm</b> • Sensor disconnection • Low battery • Circuit error • Calibration range error • Cal or bump due alarm			
		0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm   A2: 30 ppm A3: 100 ppm   TWA: 1.0 ppm STEL: 5.0 ppm						
H2S Only	EC	0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm   A2: 30 ppm A3: 100 ppm   TWA: 1.0 ppm STEL: 5.0 ppm	Display of Alarm	<b>Gas Alarm</b> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas valve • Vibration	<b>Trouble Alarm</b> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message			
CO H2 Compensated	EC	0 ~ 2,000 ppm	± 5% of reading or ± 2 ppm CO	A1: 25 ppm   A2: 50 ppm A3: 1200 ppm   TWA: 25 ppm STEL: 200 ppm						
<b>Sensor Slot 2: Combustibles (Methane as standard)</b>					Operating Temp. & Humidity					
CH4 / HC	Catalytic	0 ~ LEL (1% LEL)	± 5% of reading or ± 2 % LEL	1st: 10% LEL   2nd: 25% LEL 3rd: 50% LEL   Over: 100% LEL	-20°C ~ +50°C [-4°F ~ +122°F] 10 to 90% RH, non-condensing (continuous environment)		-40°C ~ +60°C [-40°F ~ +140°F] 0 to 95% RH, non-condensing (temporary environment)			
<b>Sensor Slot 3: Oxygen (O2)</b>					Response Time		Power Source			
O2	EC	0 ~ 40.0% Vol. (0.10%)	± 0.5% O2	Low 1: 19.5%   Low 2: 18.0% High: 23.5%   Over: 40.0%	Within 30 seconds (T90)		Config	Li-ion	Alkaline	
<b>Sensor Slot 4: Toxics &amp; CO2 *Interchangeable</b>					Dimension & Weight		Case Material		Bluetooth Communication	
SO2	EC	0 ~ 100.0 ppm (0.05 ppm)	± 10% of reading or ± 5 % of full scale	A1: 2 ppm   A2: 5 ppm A3: 100 ppm   TWA: 0.25 ppm STEL: 0.25ppm	2.9" W x 2.6" H x 1.06" D (Approx. 73 W x 65 H x 26 D mm), 4.58oz (with rubber boot)		Explosion proof, dust and water resistant to IP-66/68 (2m,1h) approval. Drop height 23 ft		BLE: with iOS and Android phone app: <a href="#">RK Link</a>	
CO2 %	IR (Available AUG 2019)	0 ~ 10.0% Vol. (0.01%)	± 5% of reading or ± 2 ppm	A1: 0.50% Vol.   A2: 3.00% Vol. A3: 4.00% Vol.   TWA: 0.50% Vol. STEL: 3.00% Vol.	Datalogging		Standard Accessories		Optional Accessories	
CO2 ppm		0 ~ 10,000 ppm (20 ppm)		A1: 5,000 ppm   A2: N/A TWA: N/A   STEL: N/A	Logs user ID, station ID, Calibration & Bump Test history, Alarm Events & Alarm Trends		Alligator clip, protective rubber boot, charger, calibration adapter		• Padded carrying case • RP-3R Attachable sampling Pump with 4" rubber nipple, 10' hose and probe (up to 40' hose available) • USB to IrDA downloading cable for datalogger • SDM-3R calibration station • Hand aspirator	
Calibration Station <b>SDM-3R</b>			Clip-On Sampling Pump <b>RP-3R</b>		Safety Design / Approvals		Warranty			
					ATEX, CSA (Pending)		Three years material and workmanship including sensors			

\*Specifications subject to change without notice



**INSTRUMENTS**  
Gas Detection For Life

(800) 754-5165

www.rkiinstruments.com

**Authorized Distributor:**