



UR OUTSTANDING PRODUCTIVITY

Quality Management System certified by TÜV Rheinland.
 AXION is a company committed to quality.




ARTICULATING AERIAL DEVICES

GENERAL SPECIFICATIONS

EQUIPMENT	UR3410
Working height ¹	32.8 ft / 10,0 m
Ground to bottom of the platform ¹	27.9 ft / 8,5 m
Maximum side reach	14.1 ft / 4,3 m
Stowed travel height ¹	8.2 ft / 2,5 m
Platform capacity ²	300 lb / 136 kg
Platform dimensions	24 x 24 x 42 in / 610 x 610 x 1070 mm
Rotation	360° continuous infinite

REACH DIAGRAM

UR3410

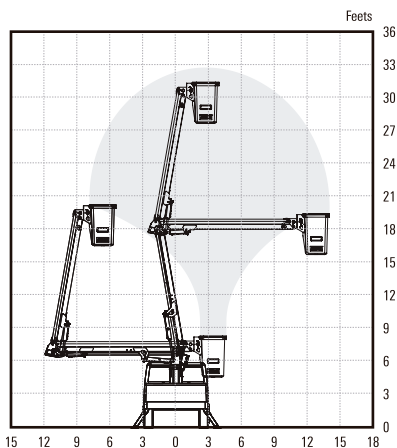

STANDARD FEATURES

- Manual emergency pump
- Emergency stop valves at the upper and lower control stations
- End-Mount platform
- Lower controls with override to the platform
- Device against accidental operation at the platform (Safe Control System)
- Automatic Platform Levelling System
- Slewing drive rotation
- Hydraulic oil level and thermometer
- Self-lubricating bushing
- Hydraulic hoses fully embedded inside boom
- Integrated Holding valves
- AXION meets or exceeds ANSI A92.2 standards
- Certified under ISO 9001 by TÜV Rheinland

OPTIONS

- Insulated 46 kV Category C
- Engine Start/Stop at platform
- Liner
- Hydraulic Platform Tilt
- "A" frame outriggers
- Horometer
- Inclinometer
- Outrigger motion alarm
- Electric emergency pump at platform
- Vinyl platform and insert cover
- Wheel chock
- Mounting brackets & stationary set-ups
- Interlock

1. Based on a chassis frame height of 40 in (1016 mm). 2. According to vehicle's GVW.

