

## Maggie is the pistol-grip locator of choice for all locating professionals

Maggie combines the best features of two flagship Schonstedt magnetic locator instruments: the sensitivity and precision of the GA-52Cx, and the single-handed operation of the GA-92XT.



### Optimized for finding

- ▶ Survey Pins, Markers and Nails
- ▶ Water & Gas Valves
- ▶ Manhole Covers
- ▶ Other deep iron/steel objects



*"I am an absolute fan of the Schonstedt. I try to get every surveyor I know to buy one. Mine has given me absolute stellar performance. I only wish all of the instruments and products I have purchased through the years for surveying actually lived up to my needs and expectations the way the Schonstedt does. Thanks again for a fine product, and for great customer service to boot!" —Arthur F. Seifert, Jr. P.L.S., Bell-Atlantic*



- ▶ Highest sensitivity
- ▶ Ergonomic & durable
- ▶ Dust & water resistant (Rated IP54)
- ▶ Easy access battery removal
- ▶ Visual display shows +/- polarities & signal strength
- ▶ HeliFlux® sensors
- ▶ Padded case & sling included for ease of carrying through rough terrain, hands-free
- ▶ 7-year warranty



The MAGGIE comes standard with:

- Padded Carrying Case
- 9V Battery

### Maggie Specifications

<b>Output:</b>	Audio and Visual
<b>Gain:</b>	Adjustable Gain with range indicated by a 4-segment LCD
<b>Depth Detection:</b>	Up to 20' deep (6.09m) (object dependent)
<b>Volume:</b>	3 Levels: Muted, Medium, and High
<b>Battery:</b>	One 9V Battery
<b>Battery Life:</b>	24 Hours (intermittent use)
<b>Operating Temperature:</b>	-13°F to 140°F (-25°C to 60°C)
<b>Overall Length:</b>	32.5" (~83 cm)
<b>Nominal Sensor Spacing:</b>	20" (~50 cm)
<b>Weight:</b>	2.6 lbs (1.2 kg)
<b>Water &amp; Dust Resistance:</b>	Rated IP54 overall, waterproof up to 16" (40.64 cm) from the bottom



Copyright © 2018 Schonstedt Instrument Company. All rights reserved. Schonstedt is a subsidiary of SPX Corporation. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Schonstedt Instrument Company.

# SCHONSTEDT®

**Contact Us:**

800-999-8280  
 schonstedt.info@spx.com

**Find Your Local Dealer:**

schonstedt.com

## Spot is the next generation stick locator

With engineering and accuracy equal to the GA-52Cx, Spot comes in a sleek, ultralight-weight package with improved ergonomics. If you're looking for High Accuracy at a Lower Cost, put Spot on the trail of your next locate.



### Optimized for finding

- ▶ Survey Pins, Markers and Nails
- ▶ Water & Gas Valves
- ▶ Manhole Covers
- ▶ Other deep iron/steel objects



Engineered with Ergonomics

### Get a Grip That Works for You

Whether your personal locating style calls for the single-handed convenience of a pistol-grip locator, or the vertical orientation of the GA-52Cx, Spot offers the versatility to work the way you like to work.



- ▶ Ergonomic & durable
- ▶ Easy access battery removal
- ▶ HeliFlux® sensors
- ▶ 7-year warranty



Durable & padded case with shoulder sling



Single-handed operation & no knobs



Easy Access Battery

## Spot Specifications

<b>Audio Output:</b>	Frequency increases or decreases with signal strength (gradient field intensity). Range: 30 to 4000 Hz.
<b>Depth Detection:</b>	Up to 18' deep (5.48 m) (object dependent)
<b>Low Battery Indicator:</b>	1/2 second audio beep, every 13 seconds
<b>Gain:</b>	5 levels: Extra Low (1), Low (2), Medium (3), High (4), Extra High (5) Audio: Progression of audio beeps to correlate with gain setting (one beep for #1, two beeps for # 2, and so on)
<b>Volume:</b>	2 Levels: Medium & Maximum
<b>Input Power:</b>	One 9V Battery
<b>Battery Life:</b>	24 Hours (intermittent usage)
<b>Operating Temperature:</b>	-13°F to 140°F (-25°C to 60°C)
<b>Overall Length:</b>	42.3 in (107.4 cm)
<b>Nominal Sensor Spacing:</b>	20 in (50 cm)
<b>Weight:</b>	~2.0 lbs (0.9 Kg)
<b>Water and Dust Protection:</b>	Rated IP54 overall, waterproof up to 27" (58 cm) from bottom tip



Copyright © 2018 Schonstedt Instrument Company. All rights reserved. Schonstedt is a subsidiary of SPX Corporation. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Schonstedt Instrument Company.

# SCHONSTEDT®

**Contact Us:**

800-999-8280  
[schonstedt.info@spx.com](mailto:schonstedt.info@spx.com)

**Find Your Local Dealer:**

[schonstedt.com](http://schonstedt.com)



## GA-92XTd Magnetic Locator Portable & Precise

This pistol-grip locator extends for accuracy and retracts for easy carrying and storage. One hand operation makes finding faster, providing both audio and visual indication of ferrous objects up to 16 feet underground. When you have your hands full on the job site, carry the XTd on your hip.




### Optimized for locating

- ▶ Water & Gas Valves
- ▶ Manhole Covers
- ▶ Other deep iron/steel objects



*"After locating the water line to the main, I started sweeping with the XT and found the box three feet below grade. Others have been over that same area before and never got a hot signal. The Schonstedt found it right away. I'm a believer for life. Thanks for making a great product."*

**—Gary F. Read, Locator for the Village of Shorewood, IL**

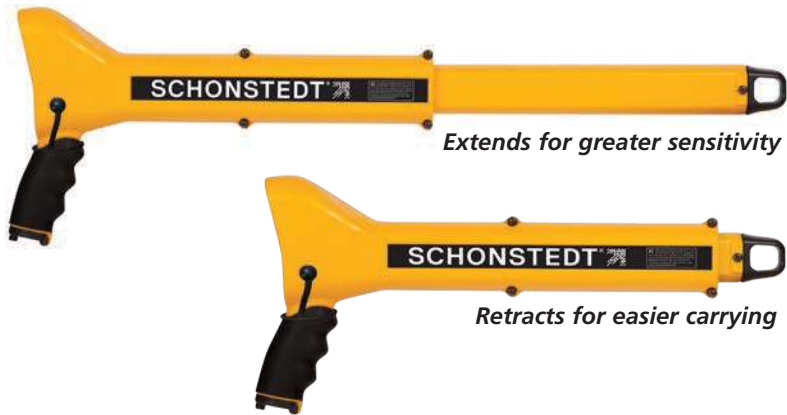

- ▶ Membrane switch
- ▶ Precision Signal Strength Indicator
- ▶ Easy access 9V battery
- ▶ Holster included



### Receiver Specifications

<b>Output:</b>	Audio and Visual
<b>Gain:</b>	4-Level LCD: Low (L), Medium (M), High (H), Extra High (XH)
<b>Volume:</b>	3 Levels: Muted, Medium, Maximum
<b>Battery:</b>	One 9V Battery
<b>Battery Life:</b>	4 Hours (intermittent use)
<b>Operating Temperature:</b>	-13°F to 140°F (-25°C to 60°C)
<b>Overall Length:</b>	Open – 26" (66 cm), Closed – 15.5" (39 cm)
<b>Nominal Sensor Spacing:</b>	9.5" (24 cm)
<b>Weight:</b>	2.5 lbs (1.1 kg)
<b>Water and Dust Resistance:</b>	Rated IP54



Copyright © 2018 Schonstedt Instrument Company. All rights reserved. Schonstedt is a subsidiary of SPX Corporation. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Schonstedt Instrument Company.

# SCHONSTEDT

Contact Us:

800-999-8280  
[schonstedt.info@spx.com](mailto:schonstedt.info@spx.com)

Find Your Local Dealer:

[schonstedt.com](http://schonstedt.com)

SCHONSTEDT INSTRUMENT COMPANY • 100 EDMOND ROAD • KEARNEYSVILLE, WV 25430 • 304-725-1050

## GA-52Cx & GA-72Cd

For decades, these iconic “yellow stick” magnetic locators have been the choice of locating professionals around the world. They are made to withstand the rigors of daily on-site usage and a wide range of environmental conditions. When precision really matters, stick to Schonstedt locators.

### Optimized for finding:

- ▶ Survey Pins, Markers & Nails
- ▶ Water & Gas Valves
- ▶ Manhole Covers
- ▶ Unexploded Ordnance
- ▶ Other deep iron/steel objects

GA-52Cx

GA-72Cd



*“I have been using your 52 CX for over thirty years, and am most pleased with not only the metal detector, but also with your service and warranty. Thank you so much for providing the surveying trade with such reliable products and such excellent service.” —George R. Hill, Grayhill Land Surveying, Twain Hart, CA*


# GA-52Cx and GA-72Cd Underground Locators

## Easy-To-Use

The GA-52Cx and GA-72Cd Locators find iron and steel objects underground. Both provide audio detection signals that peak in frequency when the locator's tip is held directly over the target. The GA-72Cd includes an easy-to-read digital and bar graph display showing signal strength and polarity.



**GA-52Cx**

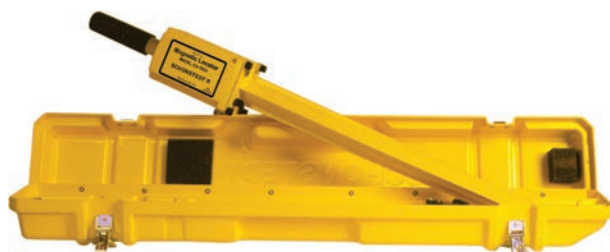

**GA-72Cd**

Specifications	GA-52Cx	GA-72Cd
<b>Audio Output:</b>	Tone frequency varies with gradient field intensity	Tone frequency varies with gradient field intensity(*)
<b>Visual Indicator:</b>	N/A	Digital readout and bar graph indicate polarity and relative strength of magnetic field
<b>Analog Output:</b>	N/A	Yes
<b>Sensitivity:</b>	5 settings	4 settings
<b>Input Power:</b>	Two 9V Batteries	Two 9V Batteries
<b>Battery Life:</b>	40 hrs (intermittent usage)	60 hrs (intermittent usage)
<b>Battery Indicator:</b>	N/A	4-segment LCD
<b>Weight:</b>	~ 2.5 lbs (1.13 kg)	~ 2.6 lbs (1.18 kg)
<b>Operating Temperature:</b>	-13°F to 140°F ( -25°C to 60°C)	-13°F to 140°F ( -25°C to 60°C)
<b>Overall Length:</b>	42.3 in (107.4 cm)	34.5 in (87.6 cm)
<b>Waterproof Length:</b>	34.5 in (87.6 cm)	21 in (53.3 cm)
<b>Sensor Spacing:</b>	20 in (50.8 cm)	14 in (35.6 cm)
<b>Housing Material:</b>	Aluminum	Polycarbonate/ABS Blend

(\*) This is the factory default audio output. An internal switch allows the user to change it to a fixed frequency and the volume varying with the gradient field intensity

Copyright © 2018 Schonstedt Instrument Company. All rights reserved. Schonstedt is a subsidiary of SPX Corporation. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Schonstedt Instrument Company.

# SCHONSTEDT®

**Contact Us:**

800-999-8280  
[schonstedt.info@spx.com](mailto:schonstedt.info@spx.com)

**Find Your Local Dealer:**

[schonstedt.com](http://schonstedt.com)